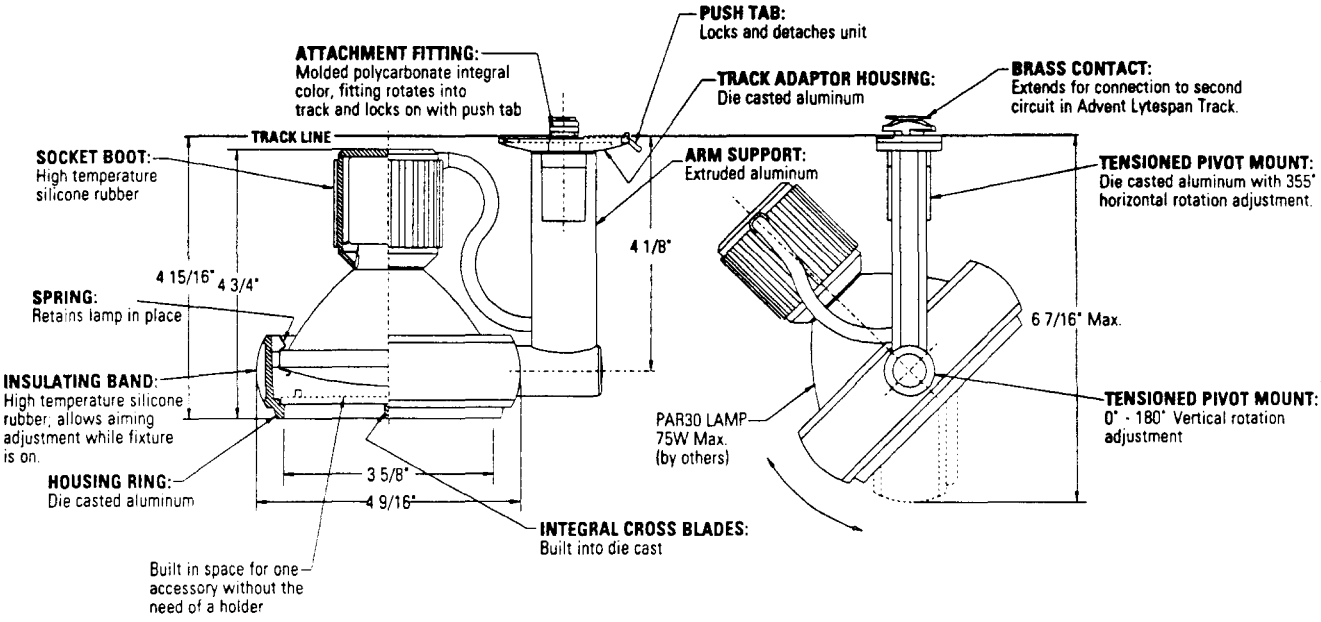

Catalog No.	Finishes	Mounting	Lamp	Accessories
8330WH	Matte White	All Lytespan Track	PAR30 75W Max.	**AF3** Series
8330BK	Matte Black	Systems		**ADF3** Series
8330AL	Aluminum			**AL3**

General Description

The minimal silhouette of the die-cast ring houses the lamp. Lightoliers unique "Cool-Grip"™ aiming system incorporates a bold silicone rubber band which surrounds the lighting element and allows youtoaim the fixture even when hot. Integral cross-blade louver provides glare reduction and holds one accessory. Lamps are sllghtly regressed to provide better cut-off than typically found in par rings.

Finish

All painted finishes baked enamel.

Electrical

Porcelain socket, medium base, nickel plated screw shell. No. 18 braided SF-1 leads with silicone sleeving.

Labels

UL; I.B.E.W.

Patents

Products shown here are protected by applicable patents and patents pending.

Job Information **Type:**

Job Name:

Cat. No.:

Lamp(s):

Notes:

Lightolier a Genlyte company www.lightolier.com
631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
© 2006 Genlyte Group LLC • B0406

LIGHTOLIER®

Lighting Data

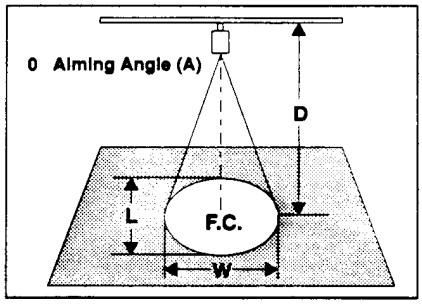

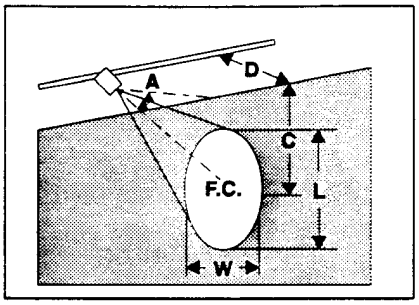

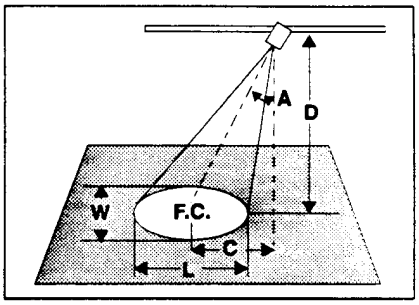

LAMP	BEAM SPREAD (To 50% Max. CP)	BEAM CTR. C.P (Candelas)	RATED LIFE (Hours)	0° AIMING ANGLE (A)				30° AIMING ANGLE (A)					45° AIMING ANGLE (A)					60° AIMING ANGLE (A)				
				DIST-ANCE (D)	F.C.	BEAM LGTH (L)	BEAM WIDTH (W)	DIST-ANCE (D)	DIST-ANCE (C)	F.C.	BEAM LGTH (L)	BEAM WIDTH (W)	DIST-ANCE (D)	DIST-ANCE (C)	F.C.	BEAM LGTH (L)	BEAM WIDTH (W)	DIST-ANCE (D)	DIST-ANCE (C)	F.C.	BEAM LGTH (L)	BEAM WIDTH (W)
50W PAR30 NSP (T-H)	12°	6,500	2,000	6'	181	1.3'	1.3'	5'	2.9'	169	1.4'	1.2'	3'	3.0'	255	1.3'	0.9'	2'	3.5'	203	1.7'	0.8'
				8'	102	1.7'	1.7'	7'	4.0'	86	2.0'	1.7'	5'	5.0'	92	2.1'	1.5'	3'	5.2'	90	2.6'	1.3'
				10'	65	2.1'	2.1'	9'	5.2'	52	2.5'	2.2'	7'	7.0'	47	3.0'	2.1'	4'	6.9'	51	3.5'	1.7'
				12'	45	2.5'	2.5'	11'	6.4'	35	3.1'	2.7'	9'	9.0'	28	3.8'	2.7'	5'	8.7'	33	4.3'	2.1'
50W PAR30 NFL (T-H)	32°	1,750	2,000	4'	109	2.3'	2.3'	3'	1.7'	126	2.4'	2.0'	3'	3.0'	69	3.7'	2.4'	1'	1.7'	219	3.0'	1.1'
				6'	49	3.4'	3.4'	5'	2.9'	45	3.9'	3.3'	4'	4.0'	39	5.0'	3.2'	2'	3.5'	55	6.1'	2.3'
				8'	27	4.6'	4.6'	7'	4.0'	23	5.5'	4.6'	5'	5.0'	25	6.2'	4.1'	3'	5.2'	24	9.1'	3.4'
				10'	7	5.7'	5.7'	9'	5.2'	14	7.1'	6.0'	6'	6.0'	17	7.5'	4.9'	4'	6.9'	14	12.2'	4.6'
50W PAR30 FL (T-H)	42°	1,100	2,000	3'	122	2.3'	2.3'	3'	1.7'	79	3.2'	2.7'	2'	2.0'	97	3.6'	2.2'	1'	1.7'	138	5.5'	1.5'
				5'	44	3.8'	3.8'	5'	2.9'	29	5.4'	4.4'	3'	3.0'	43	5.4'	3.3'	2'	3.5'	34	11.0'	3.1'
				7'	22	5.4'	5.4'	7'	4.0'	15	7.5'	6.2'	4'	4.0'	24	7.2'	4.3'	3'	5.2'	15	16.5'	4.6'
				9'	14	6.9'	6.9'	9'	5.2'	9	9.7'	8.0'	5'	5.0'	16	9.0'	5.4'	4'	6.9'	9	22.0'	6.1'
75W PAR30 NSP (T-H)	12°	10,500	2,000	8'	164	1.7'	1.7'	7'	4.0'	139	2.0'	1.7'	5'	5.0'	148	2.1'	1.5'	3'	5.2'	146	2.6'	1.3'
				12'	73	2.5'	2.5'	10'	5.8'	68	2.8'	2.4'	7'	7.0'	76	3.0'	2.1'	4'	6.9'	82	3.5'	1.7'
				16'	41	3.4'	3.4'	13'	7.5'	40	3.7'	3.2'	9'	9.0'	46	3.8'	2.7'	5'	8.7'	53	4.3'	2.1'
				20'	26	4.2'	4.2'	16'	9.2'	27	4.5'	3.9'	11'	11.0'	31	4.7'	3.3'	6'	10.4'	36	5.2'	2.5'
75W PAR30 NFL (T-H)	32°	3,000	2,000	6'	83	3.4'	3.4'	5'	2.9'	78	3.9'	3.3'	3'	3.0'	118	3.7'	2.4'	2'	3.5'	94	6.1'	2.3'
				8'	47	4.6'	4.6'	7'	4.0'	40	5.5'	4.6'	5'	5.0'	42	6.2'	4.1'	3'	5.2'	42	9.1'	3.4'
				10'	30	5.7'	5.7'	9'	5.2'	24	7.1'	6.0'	7'	7.0'	22	8.7'	5.7'	4'	6.9'	23	12.2'	4.6'
				12'	21	6.9'	6.9'	11'	6.4'	16	8.6'	7.3'	9'	9.0'	13	11.2'	7.3'	5'	8.7'	15	15.2'	5.7'
75W PAR30 FL (T-H)	42°	1,800	2,000	4'	113	3.1'	3.1'	3'	1.7'	130	3.2'	2.7'	3'	3.0'	71	5.4'	3.3'	1'	1.7'	225	5.5'	1.5'
				6'	50	4.6'	4.6'	5'	2.9'	47	5.4'	4.4'	4'	4.0'	40	7.2'	4.3'	2'	3.5'	56	11.0'	3.1'
				8'	28	6.1'	6.1'	7'	4.0'	24	7.5'	6.2'	5'	5.0'	25	9.0'	5.4'	3'	5.2'	25	16.5'	4.6'
				10'	18	7.7'	7.7'	9'	5.2'	14	9.7'	8.0'	6'	6.0'	18	10.8'	6.5'	4'	6.9'	14	22.0'	6.1'

(FC) is the initial footcandles at the center of the beam.
(L) and (W) are to the point that the candlepower drops to 50% of maximum.

Job Information **Type:**

Lightolier a Genlyte company www.lightolier.com
631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
© 2006 Genlyte Group LLC • B0406

LIGHTOLIER®